

SUBMITTAL - 30KUAH1U

Job Name: _____

Date: _____

Location: _____

R32

Indoor Unit: **AUUh30KUAS**

Outdoor Unit: **AOUH30KUAH1**



FEATURES

INDOOR UNIT:

- Circular-Flow cassette indoor unit delivering superior comfort and energy-efficient performance
- Indoor unit with ProCore™ (High Corrosion Resistant Copper) coils for long-lasting protection against corrosion
- Whisper-quiet operation with sound levels as low as 33dB
- Multiple fan speed options; Auto, High, Med, Low, and Quiet
- Special Operation modes available:
 - Economy Mode/ Energy Saving Mode / Powerful Mode / Minimum Heat Mode / Automatic defrosting operation / Auto-restart function
- Enhanced controls platform for seamless, intuitive operation:
 - Seamless control using the optional IR Receiver and Wireless Remote Controller kit
 - Optional Wi-Fi connectivity enables remote monitoring through the Airstage Mobile App
 - Extended connectivity with support for third-party interface options
 - Compatible with BACnet and Modbus protocols for seamless integration with Building Management and Home Automation Systems
- Advanced scheduling and timer options offer greater control over unit operation:
 - Weekly Timer / 24-hr Timer / Sleep Function
- Built-in drain pump for efficient water removal making installation and maintenance easier
- Optional fresh air kit, designed to boost indoor air quality and comfort
- Additional premium features include, but are not limited to:
 - Built-in external input and output for interlocking systems with 3rd party devices (Ex: Fire Alarm, Door Switch, Humidifier, Aux. Heat & more)
 - Multiple Auxiliary Heat logic for optimized heating performance
 - Service monitoring functionality via compatible accessories (UTY-RVRU & UTY-RNRUZ-series)
 - Optional human sensor detects room occupancy to enhance energy savings.
 - Offers group control, allowing seamless management of multiple units simultaneously.
 - Cassette Grille option available in sleek white and bold black colors to perfectly complement any space

OUTDOOR UNIT:

- Low GWP R-32 systems for reduced environmental impact
- Common Outdoor Unit compatible with all non-wall-mounted indoor unit types
- INVERTER-driven compressor that offers superior performance, comfort, and energy savings
- Built-in base pan heater for low ambient conditions
- Factory pre-charged for up to 98 ft (30 m) of refrigerant piping
- Compact outdoor unit with extended line set length up to 246ft (75m)
- Low ambient operation with heating down to -15°F and cooling down to -5°F
- Exceeds 100% heating capacity at 5°F and 80% at -15°F (dry bulb)
- Blue Fin-coated heat exchanger for improved corrosion resistance and coil durability



7 Year Compressor, 5 Year Parts out-of-the-box Warranty.



10 Year Compressor, 10 Year Parts Warranty when registered within 60 days of installation in a residence.



12 Year Compressor, 12 Year Parts Warranty when registered within 60 days of installation in a residence and installed by a Fujitsu Elite contractor.



Due to continuous product improvements, specifications are subject to change without notice. Please log in to the Fujitsu Portal for the most up-to-date documentation <https://connect.fujitsugeneral.com>

SUBMITTAL - 30KUAH1U

SPECIFICATIONS:

Indoor Unit				AUUH30KUAS		
Outdoor Unit				AOUH30KUAH1		
System Name				30KUAH1U		
AHRI Reference #				217895708		
Efficiency	SEER2			Btu/hW	23	
	EER2				13.7	
	HSPF 2 (IV) / HSPF 2 (V)			kW/kW	11 / 8.9	
	COP2				4.2	
Energy Star ⁹				ES, ESCC, ESME		
Operation Range	Cooling			°F (°C)	-5 to 122 ^{*8} (-21 to 50 ^{*8})	
	Heating				-15 to 75 (-26 to 24)	
Capacity	Cooling		Rated	Btu/h	30,000	
			Min.—Max.		9,600—35,000	
	Heating	47°FDB (Outdoor temp.)	Rated		32,000	
			Min.—Max.		9,200—39,000	
		17°FDB (Outdoor temp.) ^{*1}	Rated		21,000	
			Max.		34,700	
		5°FDB (Outdoor temp.) ^{* 2}	Rated		33,000	
			Max.		33,000	
Connection pipe	Size		Liquid	in (mm)	03/8 (09.52)	
			Gas		05/8 (015.88)	
	Method			ft (m)	Flare	
	Pre-charge length				98 (30)	
	Min. length				17(5)	
	Max. length				246 (75)	
Max. height difference			98 (30)			
Indoor Dimensions (H x W x D)	Net			in (mm)	11-5/16 x 33-1/16 x 33-1/16 (288 x 840 x 840)	
	Gross				13-3/8 x 37-3/8 x 38-3/16 (340 x 950 x 970)	
Indoor Weight	Net			lb (kg)	57 (26)	
	Gross				68 (31)	
Outdoor Dimensions (H x W x D)	Net			in (mm)	39-5/16 x 37 x 12-5/8 (998 x 940 x 320)	
	Gross				46-5/16 x 40-7/16 x 17-1/2 (1,176 x 1,027 x 445)	
Outdoor Weight	Net			lb (kg)	159 (72)	
	Gross				179 (81)	
Indoor Fan	Airflow rate	Cooling	High	CFM (m³/h)	942 (1,600)	
			Med		848 (1,440)	
			Low		771 (1,310)	
			Quiet		677 (1,150)	
		Heating	High		942 (1,600)	
			Med		848 (1,440)	
			Low		771 (1,310)	
			Quiet		677 (1,150)	
	Type x Qty			Turbo fan x 1		
	Outdoor Fan	Airflow rate	Motor output		W	81
Cooling			CFM (m³/h)	2,266 (3,850)		
Heating				2,148 (3,650)		
Type x Qty			Propeller fan x 1			
Indoor Sound Pressure Level*4	Motor output			W	120	
	Cooling		High	dB (A)	40	
			Med		38	
			Low		36	
			Quiet		33	
	Heating		High		40	
			Med		38	
			Low		36	
			Quiet		33	
	Outdoor Sound Pressure Level*4	Cooling				53
Heating					53	

SUBMITTAL - 30KUAH1U

SPECIFICATIONS:

Refrigerant	Type			R32		
	Charge	lb oz		5 lb 15 oz		
		g		2700		
	Additional Charge Calculation	oz/ft		0.43		
g/m		40				
Refrigerant Oil	Type			RmM68AF		
	Amount		in 3 (cm3)	70.2 (1,150)		
Moisture removal			pints/h (L/h)	6.3 (3.0)		
Drain hose(IU)	Material			Polyvinyl chloride		
	Tip Diameter		in (mm)	Ø13/16 (Ø20.7) (I.D.), Ø1-1/16 (Ø26.6) (O.D.)		
Indoor Operation range	Cooling		°F (°C)	64 to 90 (18 to 32)		
			%RH	80 or less		
	Heating		°F (°C)	60 to 86 (16 to 30)		
Electrical	System Power Supply	Voltage		V	208/230	
		Frequency		Hz	60	
		Available voltage range		V	187-253	
	Current	Cooling	A	Rated	9.7	
		Heating			9.9	
	Maximum Operating Current*3	Cooling			20	
		Heating			24	
	Outdoor Starting Current				9.9	
	Minimum Circuit Ampacity*5				28.9	
	Wiring spec.*6	MAX. CKT. BKR*7			30	
Input Power	Cooling		Rated	2.19		
			Min.—Max.	0.58—3.24		
	Heating	47°FDB (Outdoor temp.)	Rated	2.23		
			Min.—Max.	0.66—3.47		
		17°FDB (Outdoor temp.)*1	Rated	1.92		
			Max.	4.19		
		5°FDB (Outdoor temp.)*2	Rated	4.48		
			Max.	4.48		
		Power Factor	Cooling		%	98.2
Heating			97.9			

Notes:

- Specifications are based on the following conditions:
 - Cooling: Indoor temperature of 80°FDB/67°FWB (26.67°CDB/19.44°CWB), and outdoor temperature of 95°FDB/75°FWB (35°CDB/23.9°CWB).
 - Heating: Indoor temperature of 70°FDB/60°FWB (21.11°CDB/15.56°CWB), and outdoor temperature of 47°FDB/43°FWB (8.33°CDB/6.11°CWB).
 - *1: Heating (17°F): Indoor temperature of 70°FDB/60°FWB (21.11°CDB/15.56°CWB), and outdoor temperature of 17°FDB/15°FWB (-8.33°CDB/-9.44°CWB).
 - *2: Heating (5°F): Indoor temperature of 70°FDB/60°FWB (21.11°CDB/15.56°CWB), and outdoor temperature of 5°FDB/4°FWB (-15.0°CDB/-15.56°CWB).
 - Test conditions are based on AHRI 210/240 2023.
 - Pipe length: 25 ft (7.5 m), Height difference: 0 ft (0 m). (Between outdoor unit and indoor unit.)
- *3: Maximum current:
 - The maximum value when operated within the operation range.
 - The total current of indoor unit and outdoor unit.
- *4: Sound pressure level:
 - Measured values in manufacturer's anechoic chamber.
 - Because of the surrounding sound environment, the sound levels measured in actual installation conditions might be higher than the specified values here
- *5: Minimum Circuit Ampacity (Calculation based on UL60335-2-40)
- *6: Selected sample based on Japan Electrotechnical Standards and Codes Committee E0005.

As the regulations of wire size and circuit breaker differ in each country or region, select appropriate devices complied to the regional standard.

- *7: Maximum Circuit Breaker
- *8: Suction Temperature of the Outdoor Unit
- *9: Energy Star: ES = Energy Star, ESCC = Energy Star Cold Climate, ESME = Energy Star Most Efficient

System continues to operate below rated outdoor operation temperature range, subject to varying conditions. System has no low temperature cut out. Capacity is not tested outside of the rated temperature range

SUBMITTAL - 30KUAH1U

ACCESSORIES:

Model Number	Description
UTY-RVRU	KAGAMI - Wired Remote Controller
UTY-RNRUZ-Series	Wired Remote Controller
UTY-RHRYZ-Series	Wired Remote Controller - Hospitality
UTY-RSRYZ-Series	Simple Wired Remote Controller
UTY-LBTUC	IR Receiver Kit w/ Wireless Remote Controller
UTY-TFSXJ4	Wi-Fi adapter (WiFi Interface Module UART Type)
FJ-AC-WIFI-1	Intesis Wi-Fi Device: Wired Module
FJ-IR-WIFI-1NA * ¹	Intesis IR Wireless AC Cloud Control Interface
UTY-VMSX	Modbus Converter
UTY-VTGX	Network Converter - Convert H-Series Comm. Protocol to V/J-Series Comm. Protocol (Pink Wire)
FJ-AC-485-1	Intesis - BACnet MSTP & Modbus RTU Gateway,
UTY-TERX	External Switch Controller
UTY-TTRXZ1 * ²	24V Thermostat Interface
TTRXZ1-KIT * ²	24V Thermostat Interface Kit (UTY-TTRXZ1, UTY-WiFi Plug & 24V Transformer)
UTY-SHZXC	Human Sensor Kit
UTY-XCSX	External input and output PCB
UTY-XWZXZG	External Connect Kit
UTZ-GXRA	External input and output PCB box
UTZ-KXRA	High Humidity Insulation Kit
UTZ-VXRA	Fresh Air Intake Kit
UTR-YDZK	Air outlet shutter plate
UTD-LFNB	Long Life Filter
UTD-LFNC	Long Life Filter

NOTES:


*¹ Requires IR receiver kit UTY-LBTUC to connect this device to IDU.

*² This device may not be used with any other type of controls (central controller, wire/wireless RC, WiFi adapter, BMS interface).

SUBMITTAL - 30KUAH1U

INDOOR UNIT DIMENSIONS:


Unit: in (mm)

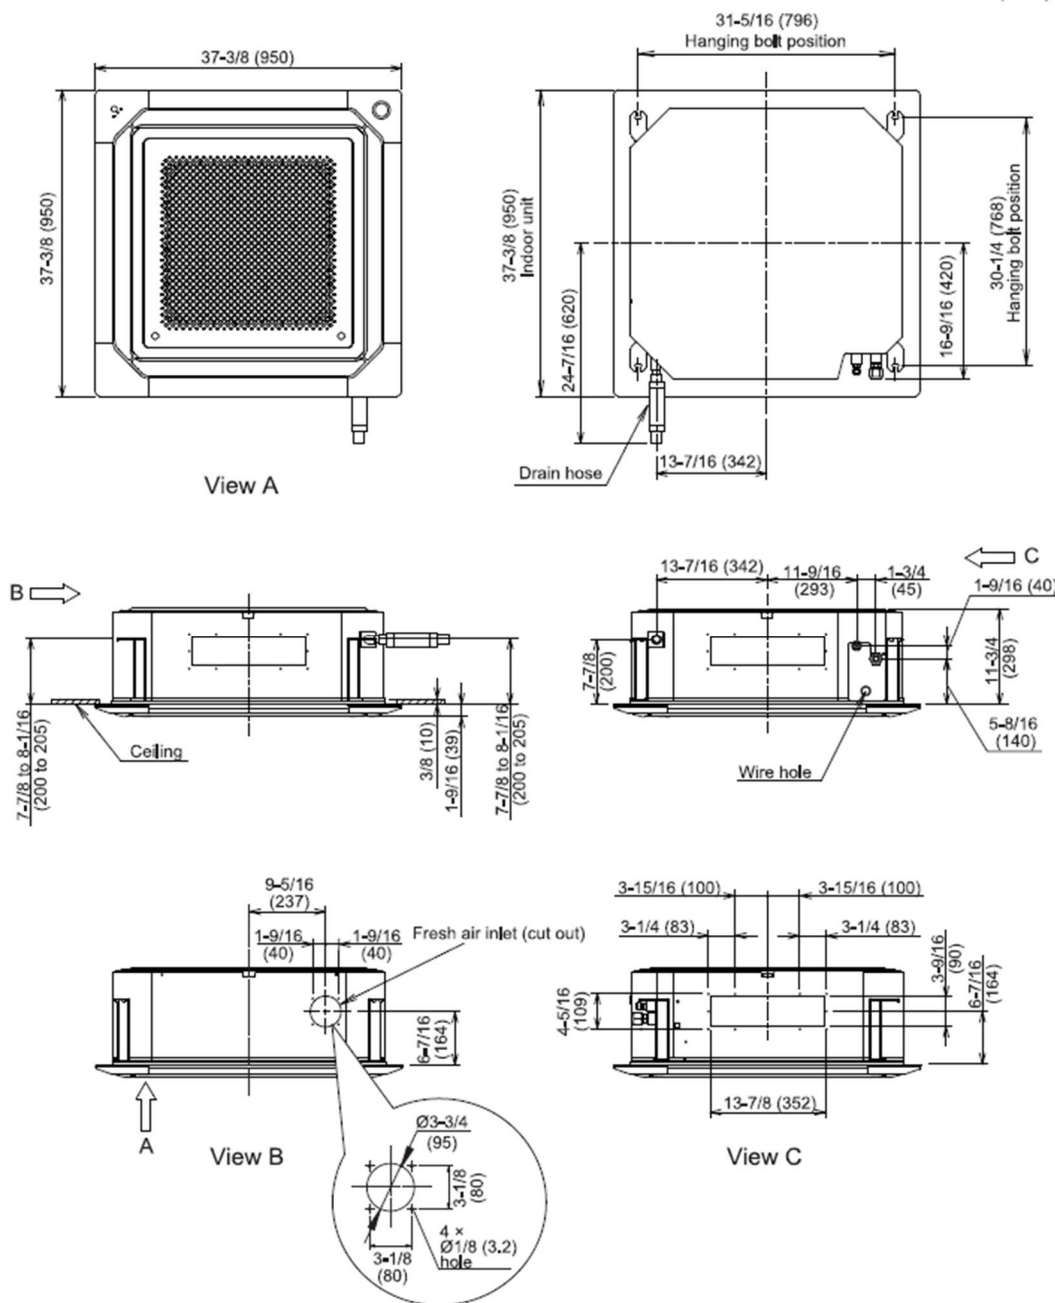


SUBMITTAL - 30KUAH1U

OUTDOOR UNIT DIMENSIONS:

Unit: in (mm)

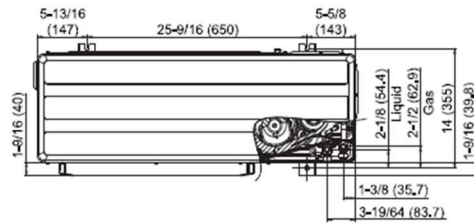


Top view

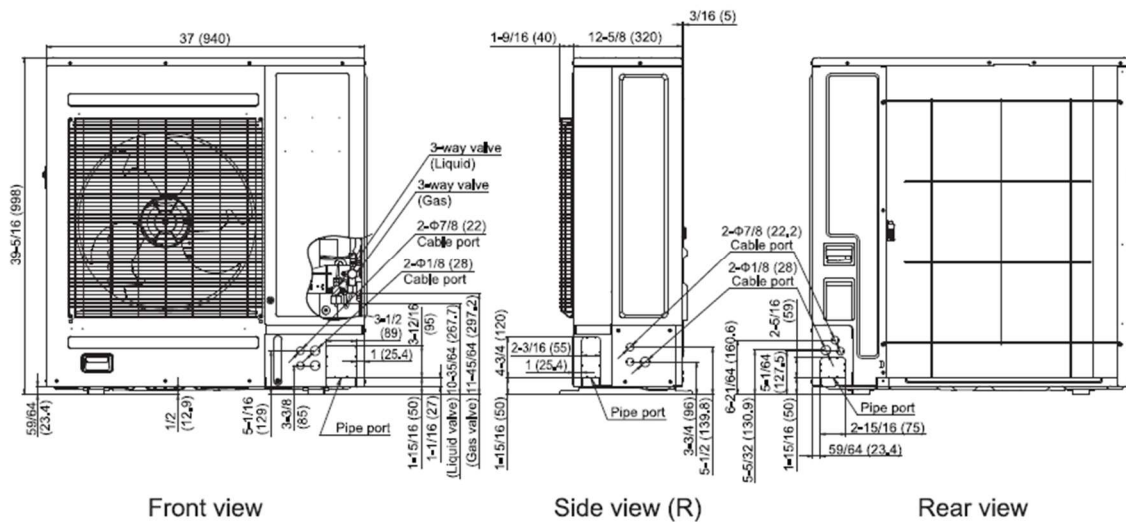

Front view

Side view (R)

Rear view

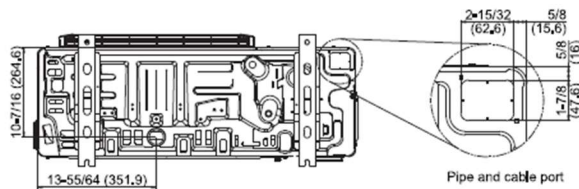

Bottom view